


# LED Test Report

**Product Mark**

Product Type :  
 Temperature :admin'C  
 Operator :admin  
 Remark:

Manufacturer :  
 Humidity :65%  
 Test Date :2026-03-25 15:15:32

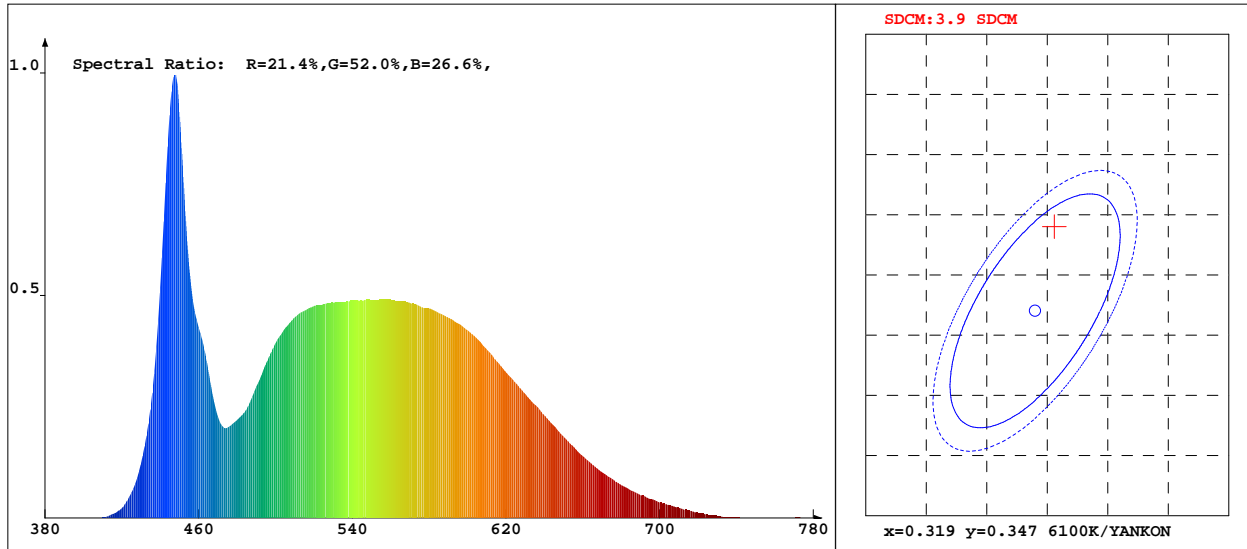

**Chroma Parameters**

Chro.Coord.:x=0.3206 y=0.3540 u=0.1941 v=0.3215 duv=0.0118  
 CCT: 6003K Dominant Wave.:515.2nm Purity:4.3%  
 Flux RGB Ratio:R=12.9%,G=83.9%,B=3.2% Peak Wave:447.6nm Half Width:16.8nm

**Rendering Index:Ra= 80.0**

R1 =75 R2 =83 R3 =92 R4 =80 R5 =78 R6 =80 R7 =87 R8 =64  
 R9 =-14 R10=63 R11=80 R12=59 R13=77 R14=96 R15=68

**Photo Parameters**

Flux:2163.62lm Effi.:162.9lm/W Radiant:8589.4mW Iv:0.0mcd  
 Efficiency:0.084 Effi Level:A++ (EU 874-2012)

**Ele. Parameters**

Voltage:U=230.500V Current:I=0.0570A  
 Power:P=13.28W Power Factor:PF=0.959

**Instrument state**

Instrument:Hopoo HP8000S Integral Time: 98.752ms VPeak: 15447  
 VDark: 1163 Scan Range: 380-780nm Product ID: 201505868