


# LED Test Report

**Product Mark**

Product Type :  
 Temperature :admin'C  
 Operator :admin  
 Remark:

Manufacturer :  
 Humidity :65%  
 Test Date :2026-03-25 15:17:50

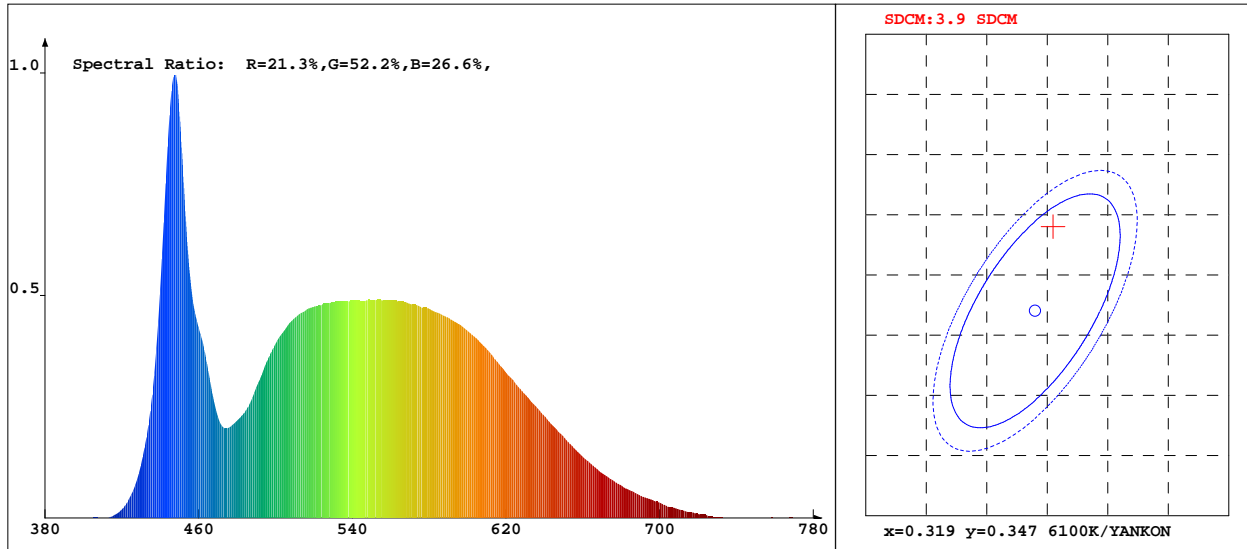

**Chroma Parameters**

Chro.Coor.:x=0.3205 y=0.3540 u=0.1940 v=0.3215 duv=0.0118  
 CCT: 6001K Dominant Wave.:514.9nm Purity:4.3%  
 Flux RGB Ratio:R=12.9%,G=83.9%,B=3.2% Peak Wave:447.6nm Half Width:17.0nm

**Rendering Index:Ra= 80.0**

R1 =75 R2 =83 R3 =91 R4 =80 R5 =78 R6 =81 R7 =88 R8 =64  
 R9 =-15 R10=63 R11=80 R12=59 R13=76 R14=95 R15=68

**Photo Parameters**

Flux:3428.46lm Effi.:160.5lm/W Radiant:8562.1mW Iv:0.0mcd  
 Efficiency:0.085 Effi Level:A++ (EU 874-2012)

**Ele. Parameters**

Voltage:U=230.500V Current:I=0.0920A  
 Power:P=21.36W Power Factor:PF=0.960

**Instrument state**

Instrument:Hopoo HP8000S Integral Time: 98.752ms VPeak: 15367  
 VDark: 1176 Scan Range: 380-780nm Product ID: 201505868