


# LED Test Report

**Product Mark**

Product Type :  
 Temperature :admin'C  
 Operator :admin  
 Remark:

Manufacturer :  
 Humidity :65%  
 Test Date :2024-10-18 08:59:08

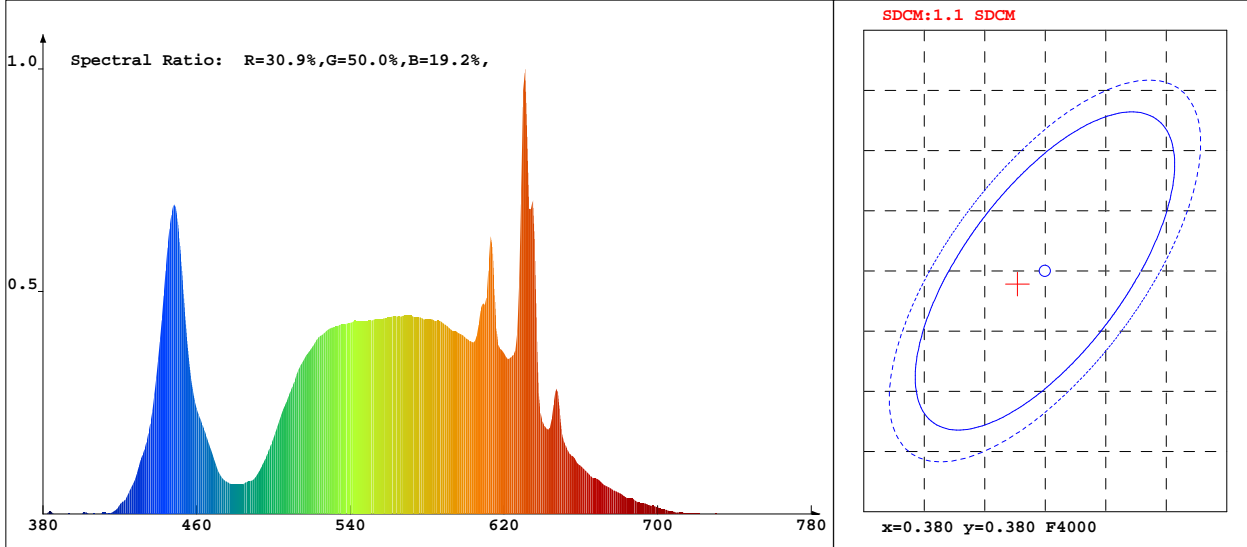

**Chroma Parameters**

Chro.Coord.:x=0.3777 y=0.3789 u=0.2224 v=0.3348 duv=0.0018  
 CCT: 4092K Dominant Wave.:577.7nm Purity:27.1%  
 Flux RGB Ratio:R=18.5%,G=79.7%,B=1.7% Peak Wave:630.7nm Half Width:8.6nm

**Rendering Index:Ra= 82.5**

R1 =84 R2 =84 R3 =81 R4 =84 R5 =82 R6 =78 R7 =89 R8 =78  
 R9 =37 R10=59 R11=84 R12=51 R13=83 R14=89 R15=81

**Photo Parameters**

Flux:5698.80lm Effi.:230.1lm/W Radiant:19158.9mW Iv:0.0mcd  
 Efficiency:0.059 Effi Level:A++ (EU 874-2012)

**Ele. Parameters**

Voltage:U=32.910V Current:I=0.7520A  
 Power:P=24.76W Power Factor:PF=1.000

**Instrument state**

Instrument:Hopoo HP8000S Integral Time: 10.000ms VPeak: 6151  
 VDark: 1136 Scan Range: 380-780nm Product ID: 201505868