


# LED Test Report

**Product Mark**

Product Type :  
 Temperature :admin'C  
 Operator :admin  
 Remark:

Manufacturer :  
 Humidity :65%  
 Test Date :2023-12-21 18:32:30

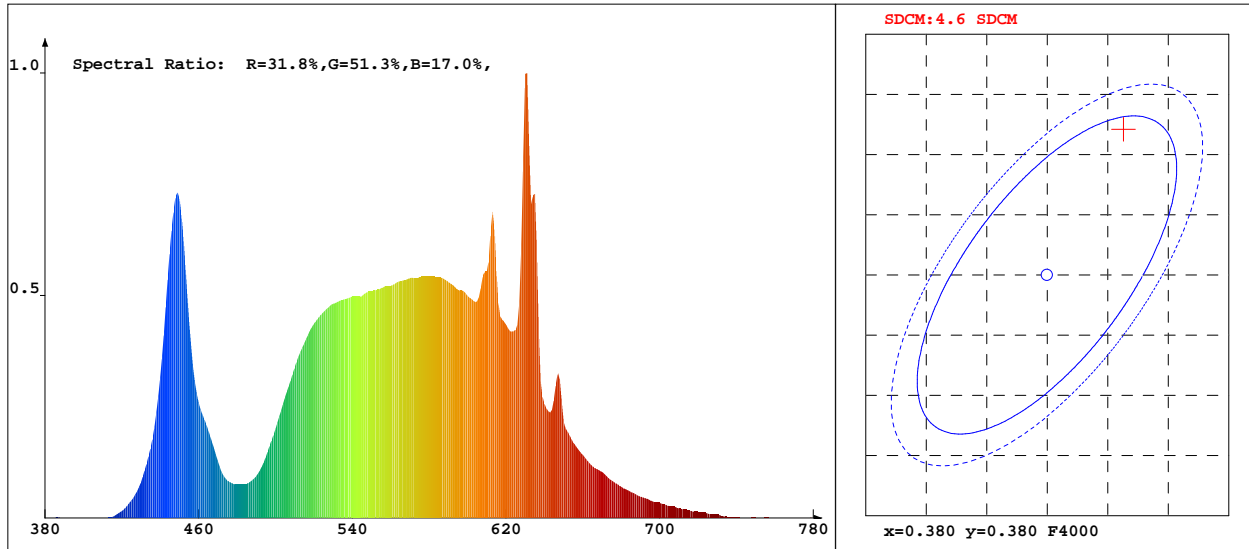

**Chroma Parameters**

Chro.Coord.:x=0.3863 y=0.3921 u=0.2229 v=0.3394 duv=0.0053  
 CCT: 3956K Dominant Wave.:576.8nm Purity:33.7%  
 Flux RGB Ratio:R=18.2%,G=80.2%,B=1.6% Peak Wave:630.4nm Half Width:9.3nm

**Rendering Index:Ra= 80.3**

R1 =80 R2 =83 R3 =84 R4 =82 R5 =78 R6 =77 R7 =89 R8 =72  
 R9 =18 R10=58 R11=80 R12=47 R13=80 R14=91 R15=75

**Photo Parameters**

Flux:6684.20lm Effi.:165.8lm/W Radiant:13549.5mW Iv:0.0mcd  
 Efficiency:0.082 Effi Level:A++ (EU 874-2012)

**Ele. Parameters**

Voltage:U=229.800V Current:I=0.1750A  
 Power:P=40.30W Power Factor:PF=0.953

**Instrument state**

Instrument:Hopoo HP8000S Integral Time: 39.042ms VPeak: 14439  
 VDark: 1116 Scan Range: 380-780nm Product ID: 201505868