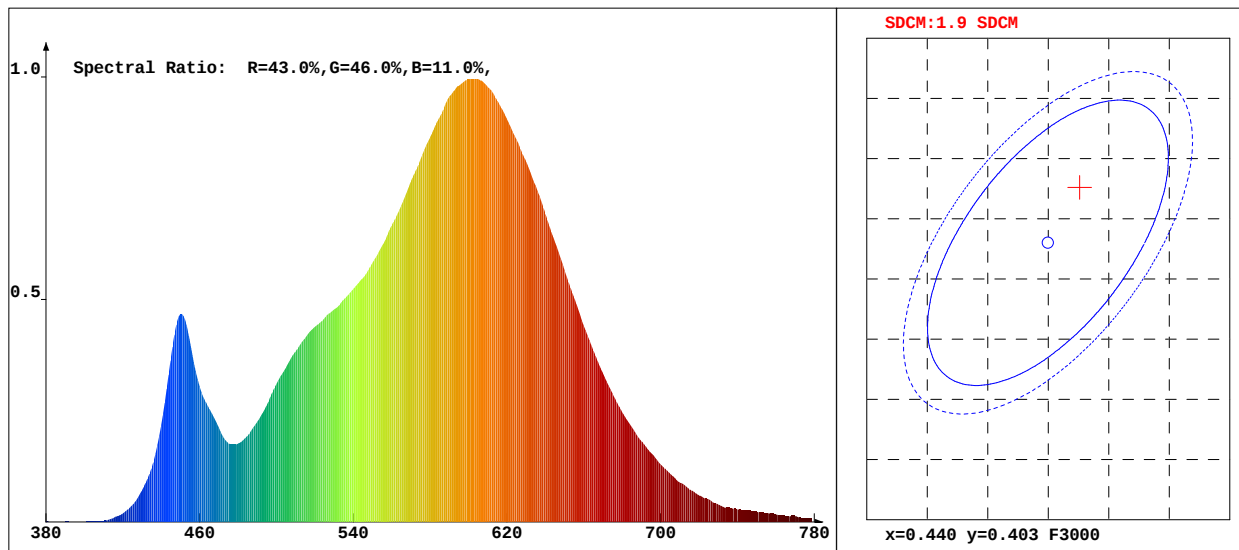


LED Test Report

Product Mark

Product Type :
Temperature : 'C
Operator : admin
Remark :

Manufacturer :
Humidity : 65%
Test Date : 2022-01-05 14:00:31

**Chroma Parameters**

Chro.Coar.: x=0.4426 y=0.4076 u=0.2527 v=0.3491 duv=0.0007
CCT: 2936K Dominant Wave.: 582.9nm Purity: 55.2%
Flux RGB Ratio: R=23.1%, G=75.5%, B=1.5% Peak Wave: 602.7nm Half Width: 120.3nm

Rendering Index: Ra= 81.2

R1 =79	R2 =90	R3 =96	R4 =79	R5 =80	R6 =89	R7 =82	R8 =56
R9 =-0	R10=78	R11=78	R12=71	R13=82	R14=98	R15=71	

Photo Parameters

Flux: 3491.50lm Effi.: 87.3lm/W Radiant: 9837.7mW Iv: 0.0mcd
Efficiency: 0.156 Effi Level: A+ (EU 874-2012)

Ele. Parameters

Voltage: U=230.400V Current: I=0.1780A
Power: P=39.97W Power Factor: PF=0.972

Instrument state

Instrument: Hopoo HP8000S	Integral Time: 72.907ms	VPeak: 14343
VDark: 1237	Scan Range: 380-780nm	Product ID: 201505868